



VFI25

VENTED GAS FIREPLACE INSERT



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model VFI25N Vented Fireplace Insert – Natural Gas, V25S2640B Surround Deluxe – Black V25T2640B Trim Black, V2R2640 Riser for Deluxe Surround V120GBL Grills – Black and LOGC6 Log Set – Five Piece Cast Split Oak with Glowing Ember Chunks.



2340 Logan Avenue
 Winnipeg, Manitoba, Canada R2R 2V3
 Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

Model	VFI25N / VFI25LP
Hi/Lo Fire Control	Yes
Input Max. (NG)	25,000 – 17,000 BTU
Input Max. (LP)	25,000 – 17,000 BTU
Venting	4"
FE (P.4.1-15)	44.58%

The Ultimate in Vented Fireplace Inserts, convert your wood burning fireplace to gas.

STANDARD FEATURES

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Blower with a thermostat controlled On/Off including variable speed control is standard on all models
- Spill Safety Switch – in case of a blocked flue or downdraft, it will shut down the unit
- Dual burner system with glowing embers
- Bedroom and Bed Sitting Room approved
- Safety Screen Barrier



Safety Screen Barrier

OPTIONS

Log Sets

LOGC6 Five Piece Cast Split Oak Log Set with glowing ember chunks, or LOGC5 Four Piece Cast Split Oak

Grills

Available in Black

Surrounds Deluxe (3 piece)

Black with Black trim

Risers for Deluxe Surrounds

Increases height coverage by 2 1/2"

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating




LOGC5 Split Cast Log Set

Model VFI25N Vented Fireplace Insert – Natural Gas, with V25S2640B Surround Deluxe – Black, V25T2640B Trim Black, V2R2640 Riser for Deluxe Surround V120GBL Grills – Black and LOGC5 Log Set – Four Piece Split Oak Set.


INSERT DIMENSIONS

VFI25

A 15 1/2"	D 14"	G 8 3/4"
B 14"	E 24 1/4"	H 16 3/4"
C 20 1/2"	F 26 1/4"	I 19"

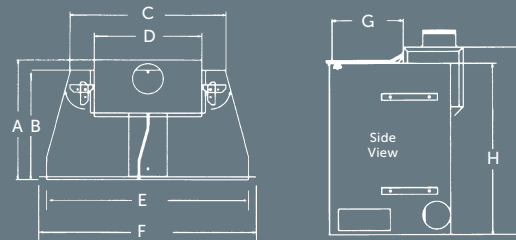

DIMENSIONS



3 PIECE SURROUND DIMENSIONS (IN.)

Models	Height	Width	Part#
DELUXE			
VFI25	24 13/16"	36 13/16"	V25S2436B

DELUXE LARGE			
VFI25	26 13/16"	40 3/16"	V25S2640B

MINIMUM SIZE FOR INSTALLATION (IN.)

Models	Front Width	Rear Width	Height	Depth
VFI25	24"	20 1/2"	17 1/2"	16"

Canada

ENERGUIDE

Look for the **ENERGUIDE** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15



FOR CALIFORNIA RESIDENTS ONLY:
WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: The model VFI25 is certified for Canada and USA: ANSI Z21.88-2014, CSA 2.33-2014, CGA 2.17-M91 (R2009) Vented Gas Fireplace Heater.



CRAFTED ENTIRELY IN CANADA, EACH KINGSMAN FIREPLACE IS BUILT TO THE HIGHEST STANDARDS AND MADE TO LAST.

Printed in Canada
 09/18 – B042