

AMBIANCE CLX2 SERIES

Recessed or Wall Mount Electric Fireplace



AMBIANCE CLX2 SERIES

Recessed or Wall Mount Electric Fireplace


The popular Ambiance CLX2 electric fireplace offers the ultimate combination of versatility and design. This award winning, upgraded product series has an improved look offering simple customization. The Ambiance CLX2 features a NEW color changing orange to blue flame for year-round use, a thermostat for setting that ideal temperature and includes 2 styles of media for 2 distinctive looks: coals and glacier diamond glass. Four unique surround options offer the ultimate customization: stainless steel, black stainless steel, flat white metal & matte black metal. The 45" and 60" sizes are the perfect addition to any room in the home.



- ### STANDARD FEATURES
- Recessed or Wall Mount Installation
 - Color Changing Orange to Blue Flame
 - Media - Coals & Glacier Glass (Included)
 - Low Energy LED Flame Technology
 - Unsurpassed Realistic Flame Pattern
 - Hi-tech Touch Screen Controls
 - New Sleek Remote
 - Can be Installed Beneath a TV
 - Variable Heat with Thermostat
 - Variable Flame Controls
 - 120 Volt Direct Plug-in
 - Do it Yourself Installation Instructions

AMBIANCE CLX2 SERIES

Available in 5 Linear Widths with More Ways to Customize

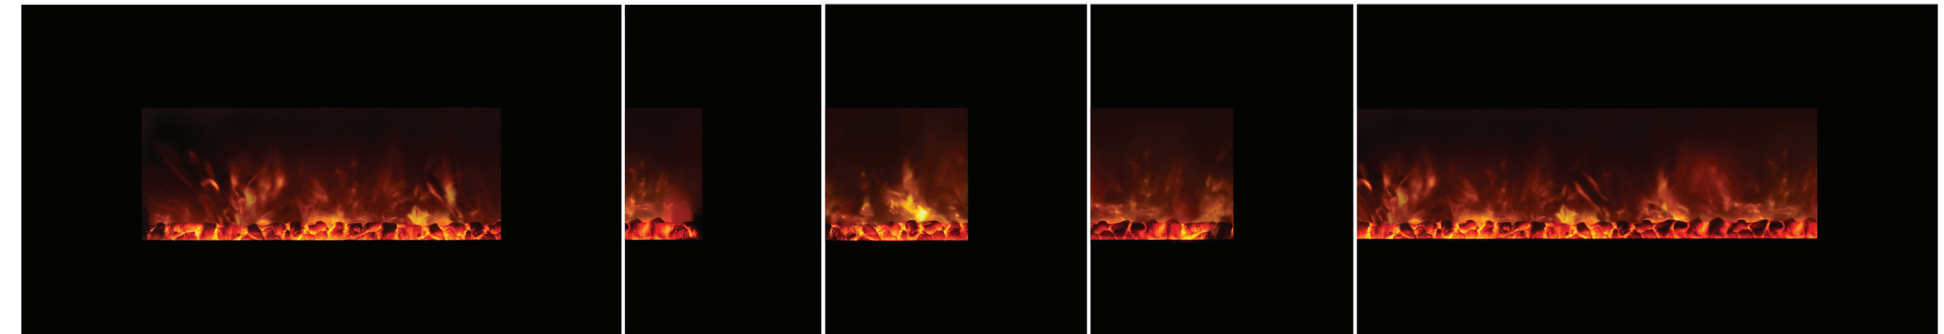


Fireplace Height 25.5" with 5 Widths Available: 45" 60" 80" 100" 144"




Orange Flames with Standard Coal Bed Orange Flames with Standard Glacier Glass Ember Bed Blue Flames with Standard Glacier Glass Ember Bed

UPGRADED FRAME OPTIONS - Touch Screen NOT available with metal frames. Can be relocated on the wall.

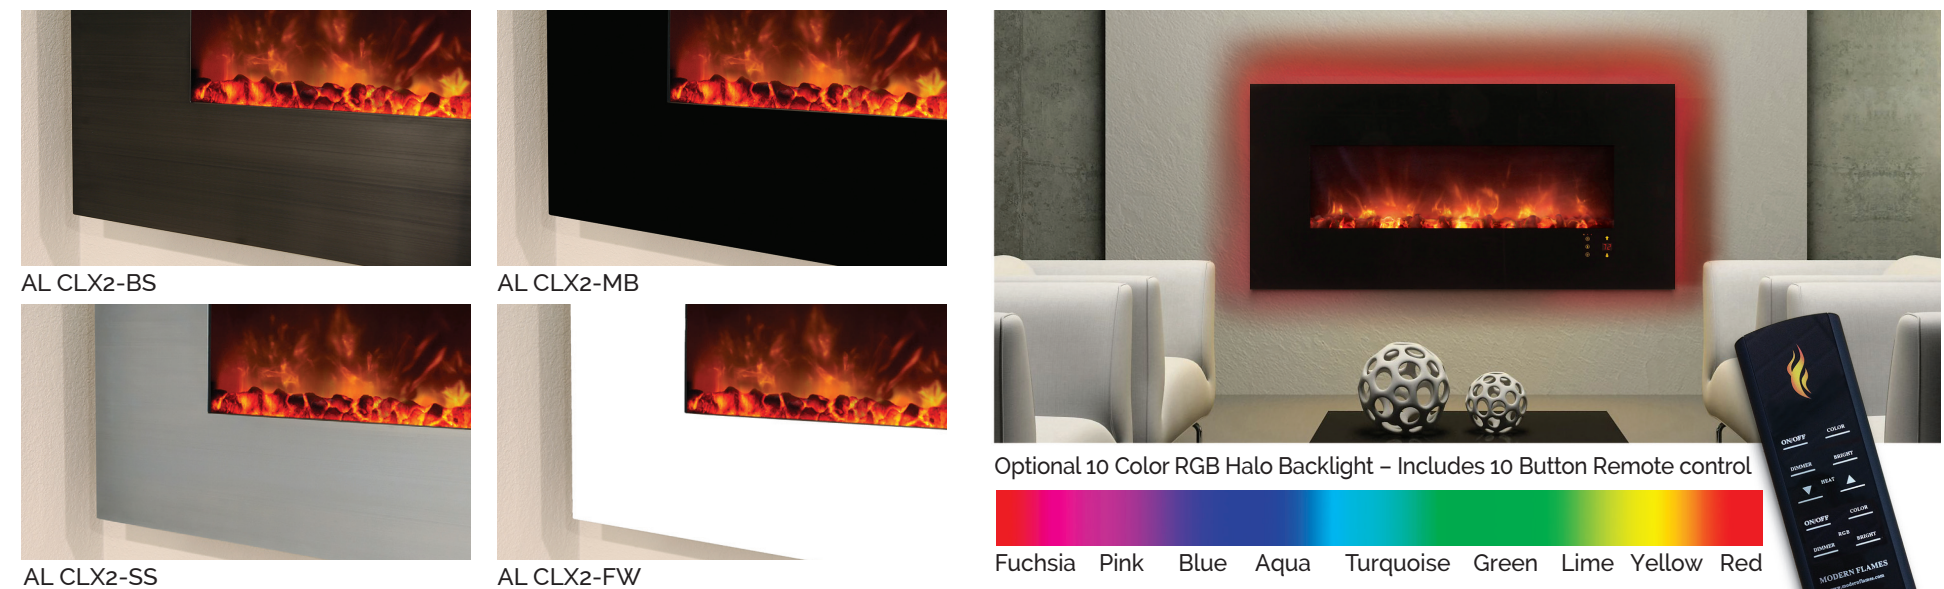

AL CLX2-BS AL CLX2-MB AL CLX2-SS AL CLX2-FW

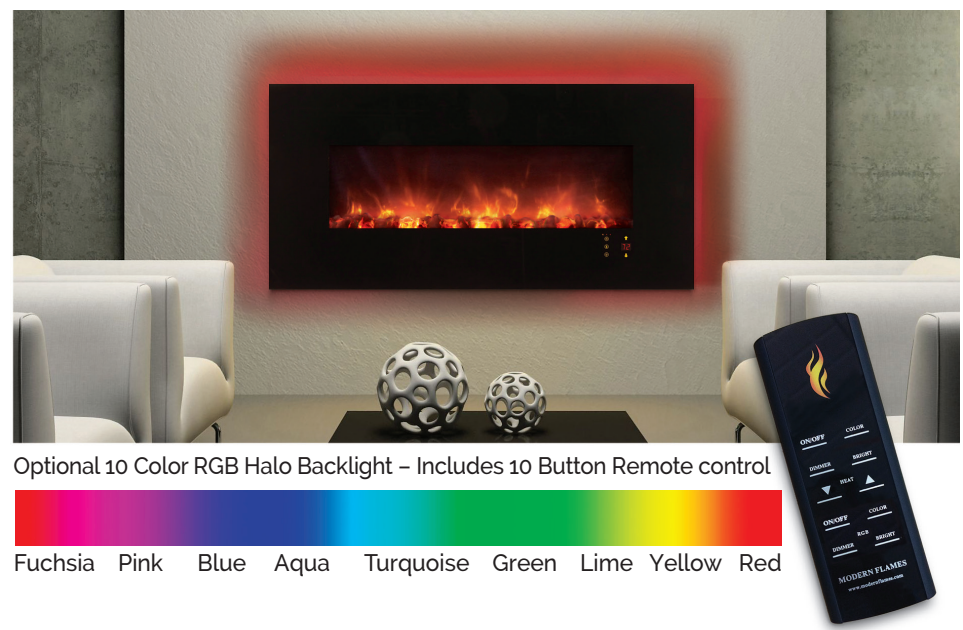

Optional 10 Color RGB Halo Backlight - Includes 10 Button Remote control

Fuchsia Pink Blue Aqua Turquoise Green Lime Yellow Red

AMBIANCE CLX2 SERIES

Technical Specs



REMOTE CONTROL

Separate controls for on/off variable heat and variable flame.



TOUCH SCREEN TECHNOLOGY

A user-friendly series of touch controls operate power, heat (on/off) and light intensity.

Press light intensity for 5 sec. and the flame changes from orange to blue.

The up/down arrows and digital readout indicate and control the temperature setting.

All touch controls fade to black after 4 sec.

With the metal face upgrades you will no longer be able to have the ability to operate the touchscreen on the face of the fireplace. A touchscreen can be mounted in the wall within 3' of the fireplace.

| MODEL # | VOLTS | WATTS | BTU's | FRAMING (FINISHED OPENING) | INSTALLATION TYPE |
|-------------|----------------|-------|-------|-------------------------------|-----------------------|
| AL45CLX2-G | AC 120V / 60Hz | 1,520 | 5,000 | 30" L x 19 1/2" H x 4" D | Recessed / Wall Mount |
| AL60CLX2-G | AC 120V / 60Hz | 1,530 | 5,000 | 45" L x 19 1/2" H x 4" D | Recessed / Wall Mount |
| AL80CLX2-G | AC 120V / 60Hz | 1,550 | 5,000 | 65" L x 19 1/2" H x 4" D | Recessed / Wall Mount |
| AL100CLX2-G | AC 120V / 60Hz | 1,570 | 5,000 | 85" L x 19 1/2" H x 4" D | Recessed / Wall Mount |
| AL144CLX2-G | AC 120V / 60Hz | 1,610 | 5,000 | 131 1/2" L x 19 1/2" H x 4" D | Recessed ONLY |

| MODEL # | A | B | C | D | E | F | G |
|-------------|-----|------|--------|----------|---------|------|---------|
| AL45CLX2-G | 10" | 27" | 5 1/8" | 29 1/4" | 19 1/4" | 45" | 25 1/2" |
| AL60CLX2-G | 10" | 42" | 5 1/8" | 44 1/4" | 19 1/4" | 60" | 25 1/2" |
| AL80CLX2-G | 10" | 62" | 5 1/8" | 64 1/4" | 19 1/4" | 80" | 25 1/2" |
| AL100CLX2-G | 10" | 82" | 5 1/8" | 84 1/4" | 19 1/4" | 100" | 25 1/2" |
| AL144CLX2-G | 10" | 126" | 5 1/8" | 122 1/2" | 19 1/4" | 144" | 25 1/2" |

AL60CLX2 TECHNICAL DRAWING SHOWN

